


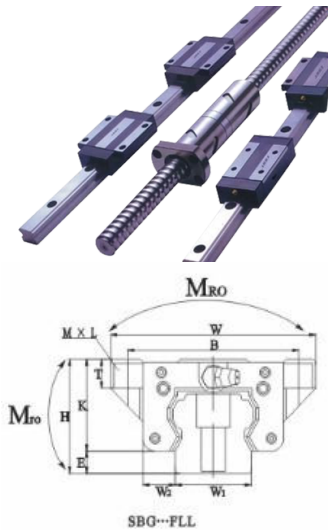

Type : SBG25SLL

Mounting Dimensions

Height(H) : 40

E : 5.2

W2 : 12

Width(W) : 48

Length(L) : 102.5

Block Dimensions

Mounting tab hole(B×J) : 35*50

Mounting tab hole(M×L) : M6*8

L1 : 78.6

J1 : 14.3

K : 35.5

T : 8

Nipple Mounting Hole : M6*0.75

Nipple(T1) : 9.95

Nipple(N) : 12

Rail Size

Width(W1) : 23

Height(H1) : 21.8

Pitch(F) : 60

Bolt Hole(d×D×h) : 7*11*9

G : 20

Max.length Of rail Lomax : 4480

Load capacity

Dynamic C(kgf) : 2770

Sationary Co(kgf) : 4680

Stationary moment(kgf.M) MRO : 48

Stationary moment(kgf.M) MPO : 54

Stationary moment(kgf.M) MRO : 53

Weight

bearing (kgf) : 0.8

rail (kgf/M) : 3.14